



CONTINUOUSLY VARIABLE ATTENUATORS


Miniature Models




Standard Form
2191 & 3651







P Option
4321 & 4322



T Option
4319 & 4320





D Option
0-3345 & 0-3346

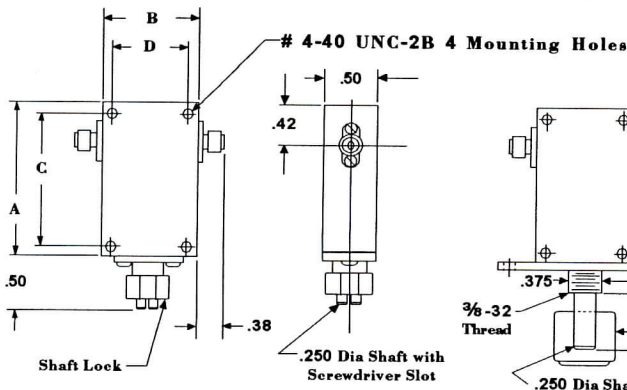

Dimensions - Inches

Form	A	B	C	D
2191	1.75	1.00	1.594	0.844
3651	2.00	1.25	1.844	1.094



OPTIONAL FEATURES

APPLICATIONS

The standard attenuator packages, Forms 2191 and 3651, have non-translating 1/4" diameter shafts with lock nut. They achieve full attenuation in less than 20 turns. To maintain versatility this attenuator comes in 3 other packages. To specify these options, precede the model number with P for panel-mount version, T for turns-counting version, or D for digital-counter version.

When options are ordered, Standard Form 2191 changes to Form 4321 for panel-mount type, Form 4319 for turns-counting type or Form 0-3345 for digital-counter type. Standard Form 3651 becomes Form 4322 for panel-mount type, Form 4320 for turns-counting type or Form 0-3346 for digital counter type.

The standard forms are ideal for applications where attenuation can be set, then locked and left for long periods of time without movement. The panel-mount version is ideally suited for applications where front panel adjustment is required and monitored via output power. Turns-counting dials are ideally suited for panel mount applications where calibration or reference for resetting is required. The digital counter version performs the same task as the turns-counting dial but with greater resolution. Both T & D options can be calibrated by utilizing a calibration chart. Order CT or CD option.

