

GENERAL SPECIFICATIONS


SMA SERIES

Frequency Range DC-6.0 GHz
 VSWR 1.20 max
 RF Power 2 Watts average
 500 Watts peak
 Nominal Impedance 50 Ohms
 Atten Accuracy 1 to 6 dB ± 0.3 dB
 7 to 20 dB ± 0.5 dB
 21 to 30 dB ± 0.75 dB
 Temperature Range. -55°C to +85°C
 Connectors SMA Male/Female
 Material Stainless Steel

Model No. 5402-XX



Form 6858




TYPE N SERIES

Frequency Range DC-6.0 GHz
 VSWR 1.20 max
 RF Power 2 Watts average
 2000 Watts peak
 Nominal Impedance 50 Ohms
 Atten Accuracy 1 to 6 dB ± 0.3 dB
 7 to 20 dB ± 0.5 dB
 21 to 40 dB ± 1.0 dB
 41 to 60 dB ± 1.5 dB
 Temperature Range. -55°C to +85°C
 Connectors Type N Male/Female
 Material Stainless Steel

Model No. N5402-XX



Form 7266

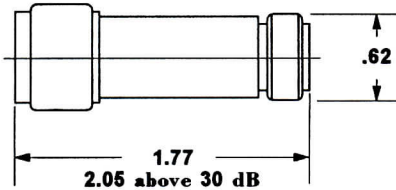

BNC SERIES

Frequency Range DC-2.0 GHz
 VSWR. 1.30 max
 RF Power 2 Watts average
 500 Watts peak
 Nominal Impedance. 50 Ohms
 Atten Accuracy 1 to 6 dB ± 0.3 dB
 7 to 20 dB ± 0.5 dB
 21 to 30 dB ± 0.75 dB
 31 to 60 dB ± 1.5 dB
 Temperature Range. -55°C to +85°C
 Connectors BNC Male/Female
 Finish Silver Plate

**50 Ohms Model No. BNC3402-XX
 for 75 Ohms version, Form 6950
 changes to 6841; contact factory.**



Form 6950

