


LINE STRETCHERS SMA MODELS



DC-18 GHz



**Model No. 9428T
Form 4795**

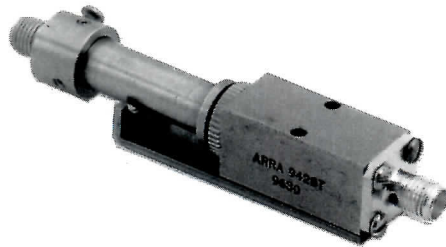

**Model No. 9428T-MF
Form 4795-1**

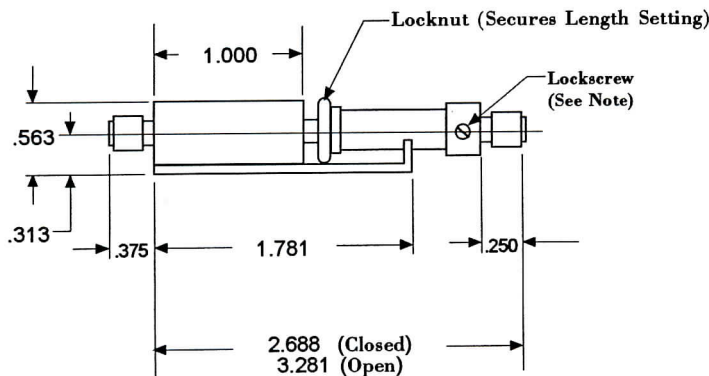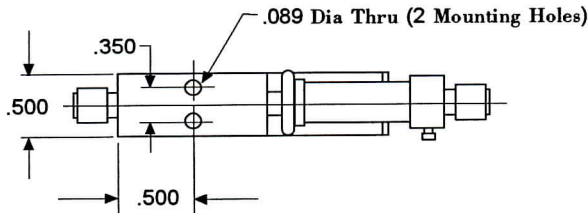

Note : Loosening lock screw allows length adjustment without disconnecting cable.

GENERAL SPECIFICATIONS

- Frequency Range DC - 18 GHz
- Phase Adjustment 15° / GHz
- VSWR 1.3 to 4 GHz
1.5 to 18 GHz
- Insertion Loss 0.5 dB to 12 GHz
0.75 dB to 18 GHz
- Insertion Delay (Approx) 0.306 nsec min to
0.348 nsec max
- RF Power 100 Watts average
5 kW peak
- Connectors SMA Female *
- Mounting Provision 2 Thru Holes
- Finish MIL-C-39012

Frequency Range	Models
DC - 2 GHz	3428T
DC - 4 GHz	4428T
DC - 8 GHz	5428T
DC - 12 GHz	6428T
DC - 18 GHz	9428T

* For SMA Male/Female connectors, suffix model number with -MF. Ex: 9428T-MF. Form 4795 changes to Form 4795-1.